



UNI EN ISO 6789

The wrench that does not require releasing tension after use. 100% Italian-made, it is ideal for controlled tightening of screws/bolts.

ZERO-RESET TECHNOLOGY: Based on higher-performance materials and improved heat treatment of both the spring and the component parts of the adjustment system, the wrench no longer requires releasing tension after use.

EASY SETTINGS: The graduated vernier scale allows minimum interval fractions to be set up (in tenths of Nm).

IMPROVED VISIBILITY: Double graduation in Nm for clearer, simpler torque visibility.

100% ITALIAN-MADE: Entirely designed and manufactured in Italy, assembled, tested and certified at Beta's Dynalab, at our headquarters in Sovico, which translates into top-quality torque wrenches.

WIDE RANGE: The range comprising 7 wrenches allows tightening from 5 Nm to 300 Nm, with 1/4" to 1/2" male square drives.




REVERSIBLE RATCHET: 72 tooth mechanism, for quick, accurate wrench operation, ensuring a take-up angle of no more than 5°. Ideal for right-hand tightening; torque accuracy: $\pm 3\%$

DOUBLE GRADUATION: High scale visibility. Easy-to-select settings, with extremely accurate increments.

BI-MATERIAL HANDLE: Ergonomic handle, for a safe, comfortable hold. Made from materials resistant to fuel, oil and industrial liquids.

TORQUE LOCKING PUSH-PULL SYSTEM: Lock/release knob with high-visibility red ring in released position. Torque is set by rotating the handle.

CLICK MECHANISM: The mechanical click can be heard and touched.

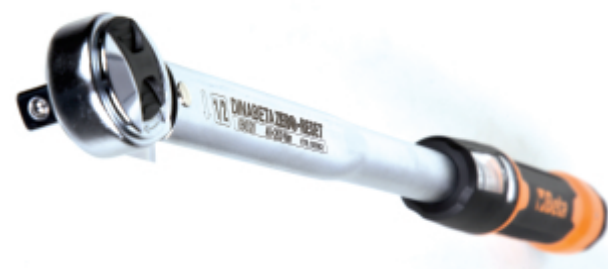

		art.
	006660702	666/2
	006660703	666/2X
	006660705	666/5
	006660710	666/10
	006660711	666/10X
	006660720	666/20
	006660730	666/30